


LEAF GRATE and/or
GRAVEL GRATE

ART.	24
B	180
H	80
C	160




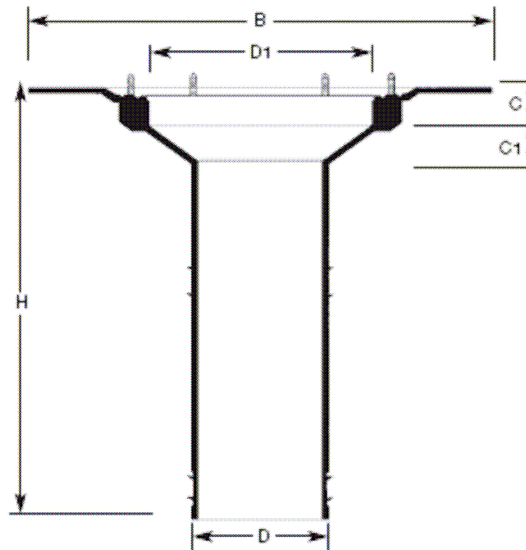


ART.	129	130	132	133	134	136
DENOM	75	80	100	110	125	150
B	340	340	340	340	340	340
H	330	330	330	330	330	330
D	75	80	100	110	125	150
D1	170	170	170	170	170	170
C	30	30	30	30	30	30
C1	20	20	20	50	20	20

INSTALLATION METHOD

- 1°: Place the unit over the drain pipe.
- 2°: Install the waterproofing membranes.
- 3°: Press the membrane over the lugs so that their position is evident. Carefully cut the membrane over the lugs so that they protrude through the membrane.
- 4°: Place the ring over the lugs and hold in position with 2 bolts and cut the membrane from inside the ring.
- 5°: Position and fasten the other bolts and washers, position the leaf guard/gravel ring.

BITUMINOUS MEMBRANES



SYNTHETIC MEMBRANES

